

GRAS 26AR

1/4" Standard Preamplifier with Integrated Mini-connector



Freq range: 2.5 Hz - 200 kHz
Noise: 4 μ V Gain: -0.35 dB
Special feature: For integration into structures

The GRAS 26AR 1/4" Preamplifier is a small robust unit short enough for use in confined spaces. It has a very low inherent-noise level, a wide dynamic range and a frequency response from below 2 Hz to above 200 kHz.

Typical applications and use

- For use in confined spaces
- High frequency measurements
- High pressure measurements
- Sound intensity measurements
- Near-field measurements
- Anechoic boxes
- Hearing-aid measurements

Special Properties

- Wide frequency range
- Low noise level
- Very small dimensions
- 4-pin LEMO 00 connector

Design

All GRAS microphone preamplifiers are based on a small ceramic thick-film substrate with a very high input impedance. The ceramic substrate is shielded by a guard ring to minimize the influence of stray capacitance and microphonic interference. The casing is made of stainless steel for maximum strength and durability. The small dimensions of this preamplifier ensure reliable operation under humid conditions owing to the heat generated by internal power dissipation.

Dynamic Range

GRAS 26AR can handle both single and dual-sided power supplies. The supply can vary between 28 VDC and 120 VDC single-sided or ± 14 VDC and ± 60 VDC dual-sided. When using the high supply voltage (120VDC or ± 60 VDC), the dynamic range exceeds 140 dB.

Noise

The electrical circuit in GRAS 26AR is built on a ceramic substrate using selected low-noise components to gain very low self-noise. The electrical self-noise is so low that system noise is

mainly determined by the microphone capsule's thermal noise.


Frequency response

The low-frequency cut-off of the GRAS 26AR preamplifier is mainly determined by the input impedance of the preamplifier and the capacitance of the microphone capsule. The capacities 20 pF, 6.4 pF and 3 pF equal the typical capacitances of 1/2", 1/4" and 1/8" microphone cartridges respectively.

The high-frequency cut-off is determined by the preamplifier's ability to drive capacitive loads (slewrate), caused by the cable. For large-signals, the effects of these parameters must be accounted for when measurements are performed. The large-signal response for GRAS 26AR for various capacitive loads corresponding to different cable lengths is shown in the data sheet. The output level is in decibels relative to 1 Volt. Typical capacitance for the cable is 100pF/m (30pF/foot).

Connector


GRAS 26AR is to be connected with a 3m light-weight cable (AA0057). Its 4-pin LEMO plug connects to the preamplifier and its 7-pin LEMO to a power module. The cable is only 2.5 mm in diameter and will withstand temperatures from -40 °C to $+150$ °C. An adapter GR0010 for GRAS 1/2" microphones is included.

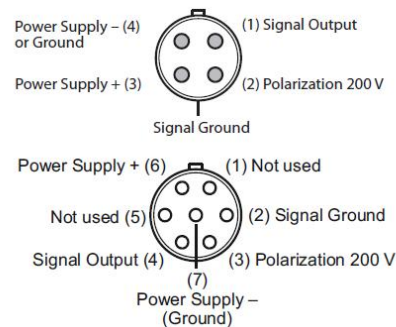


*Ext. view of 4-pin LEMO plug 00 male and 7-pin
LEMO plug 1B male (ext. view)*

| | | |
|---|-----------------------------|-------------------------|
| Frequency range (± 0.2 dB) with 18 pF microphone dummy | Hz | 2.5 to 200 k |
| Slew rate | V/ μ s | 20 |
| Input impedance | G // pF | 20 // 0.4 |
| Output impedance | | 75 |
| Output Voltage Swing, max. @ ± 14 V/+28V power supply | Vp | 10 |
| Output Voltage Swing, max. @ ± 60 V/+120V power supply | Vp | 50 |
| Noise (A-Weighted) max. | μ V | 6 |
| Noise (A-Weighted) typ. | μ V | 4 |
| Noise (Linear 20 Hz – 20 kHz) max. | μ V | 10 |
| Noise (Linear 20 Hz – 20 kHz) typ. | μ V | 8 |
| High-pass filter @3dB cut-off | Hz | TBD |
| Gain | dB | -0.35 |
| Power supply, single | V | 28 to 120 |
| Power supply, balanced | V | ± 14 to ± 60 |
| DC-offset, min., single supply | V | $0.5 \times V_s - 1$ |
| DC-offset, max., single supply | V | $0.5 \times V_s + 4$ |
| DC-offset, balanced supply | V | -1.5 to 5 |
| Temperature range, operation | $^{\circ}$ C / $^{\circ}$ F | -30 to 70 / -22 to 158 |
| Temperature range, storage | $^{\circ}$ C / $^{\circ}$ F | -40 to 85 / -40 to 185 |
| Humidity range non condensing | % RH | 0 to 95 |
| Connector type | | 4-pin LEMO (FGG.00.304) |
| CE/RoHS compliant/WEEE registered | | Yes / Yes, Yes |
| Weight | g / oz | 4.0 / 0.14 |

Conditions: 23 $^{\circ}$ C Ambient temperature, ± 60 V/+120V power supply, 18 pF dummy microphone, 3 m output cable.

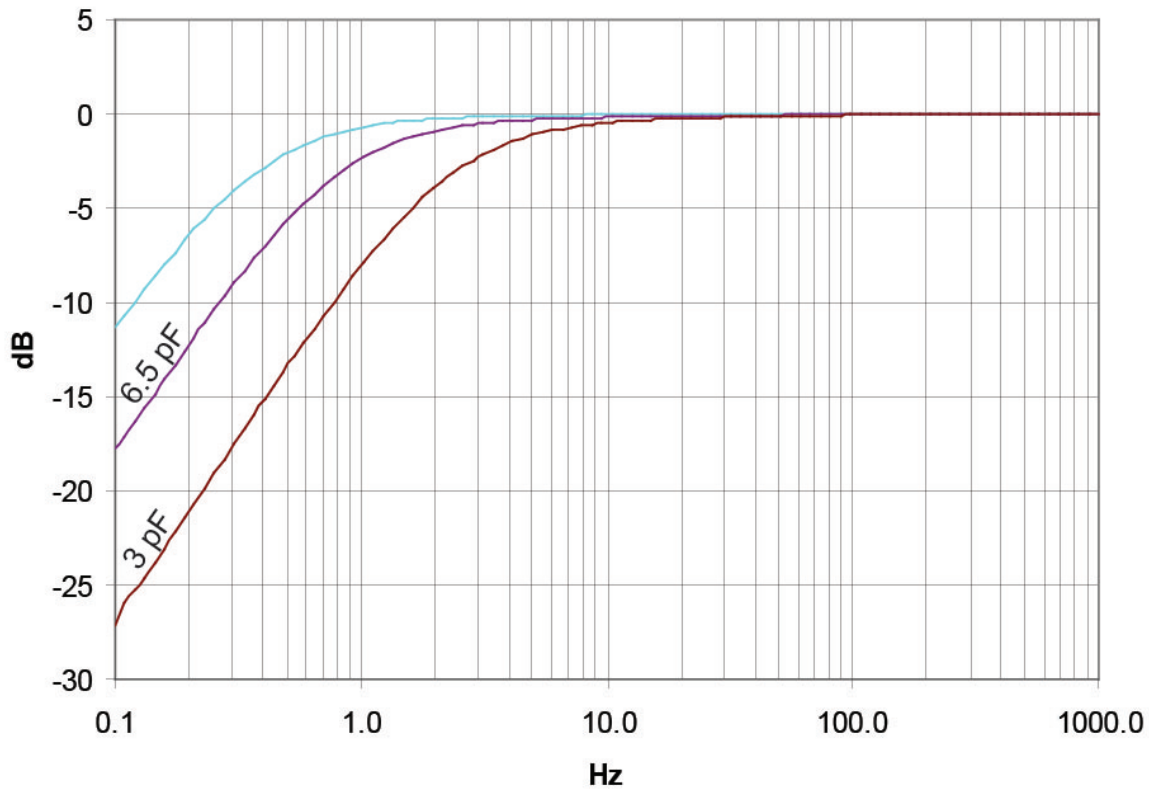



Typical low-frequency response of Type 26AL for 1/2" (20 pF), 1/4" (6.5 pF) and 1/8" (3 pF) microphones

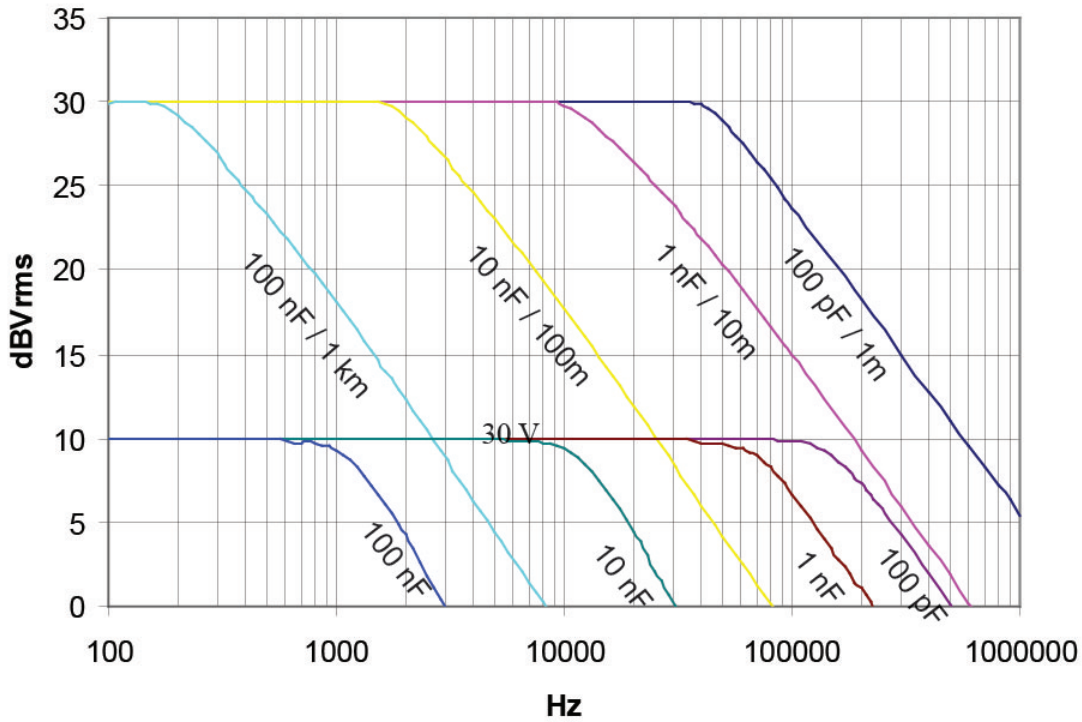

Typical max. rms output signal with 120 V and 30 V supply

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions in mm



Included items

| | |
|-----------------------------|---|
| GRAS GR0010 | Adapter for 1/4" preamplifier and 1/2" microphone |
|-----------------------------|---|

Optional items

| | |
|-----------------------------|--|
| GRAS AA0057 | 3 m LEMO 00 4-pin - LEMO 7-pin Cable for 26AR |
| GRAS AL0029 | 1/4" Microphone Holder, POM |
| GRAS AL0013 | 1/4" Microphone Holder, Stainless Steel |
| GRAS AL0005 | Swivel head |
| GRAS AL0006 | Tripod |
| GRAS RA0063 | Adapter for 1/8" microphone and 1/4" preamplifier |
| GRAS RA0006 | Right-angled (90°) Adapter for 1/4" Microphone and 1/4" Preamplifier |
| GRAS RA0080 | 6pF Preamplifier-input adapter for 1/4" microphones |
| GRAS 12AA | 2-Channel Power Module with gain, filters and SysCheck generator |
| GRAS 12AQ | 2-Channel Universal Power Module with signal conditioning and PC interface |

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more than 40 countries

HEAD OFFICE, DENMARK
GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.GRASacoustics.com
gras@grasacoustics.com

USA
GRAS SOUND & VIBRATION
9290 SW Nimbus Avenue
Beaverton, OR 97008
Tel: 503-627-0832
Toll Free: 800-231-7350
www.GRASacoustics.com
sales-usa@grasacoustics.com

UK
GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.GRASacoustics.com
sales-uk@grasacoustics.com

CHINA
GRAS SOUND & VIBRATION
Room 315, RuiBo Center(T1)
Lane683, Shenhong Rd,
Minhang District,
Shanghai, China, 201107
Tel: +86 21 64203370
www.GRASacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS
An Axiometrix Solutions Brand